

vivalyte

LED makes the difference

LOW TEMPERATURE SERIES

<10 °C temperature rise when light up
Ideal for heat sensitive places such as:
museum, cosmetics show cases

VIVALYTE B.V.


Tel.: +32 56 42 65 35

Mail: info@vivalyte.com Web: www.vivalyte.com

Add.: Kouterstraat 6, Wevelgem, B-8560, Belgium

VAT: BE0500611159



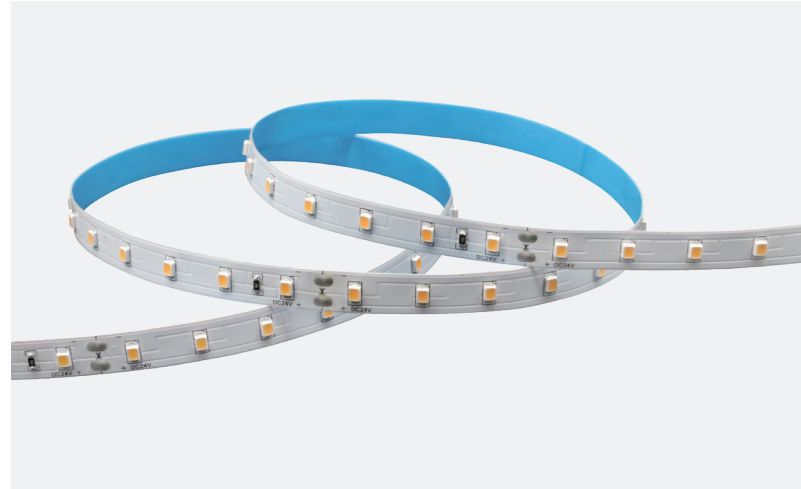

VF2-T-H2835-XXX-24



Color Available



IP Rating	IP22(N)	IP64(WP)	IP65(WS)	IP67(WT)	IP67(WHE)	IP68(WE)	IP68(WTSMWTU)
Graphical							
PCB Width(mm)	10	10	10	10	10	10	10

DC 12/24V **5 yrs warranty**

Optical & Electrical Parameters



Model No.	Voltage[V DC]	Light Color	CCT[K]	Ra	Luminous Flux(lm/m)	Efficacy(lm/W)	Power[W/m]
VF2-T-H2835-64-24	24	W	4000	90/95+	863/646	144/112	5.76
VF2-T-H2835-96-24	24				880/671	148/116	5.76
VF2-T-H2835-128-12	12				1089/889	141/116	7.68
F2-T-H2835-128-24	24				1236/889	147/116	7.68

Other Parameters


Model No.	LED QTY(pcs/m)	Max Run(m/inch)	Min Cuttable Length(mm/inch)	Standard Packing Size/Reel L*W(mm/inch)
VF2-T-H2835-64-24	64	8.0[314.96]	125.0[4.92]	5000X10[196.85X0.39]
VF2-T-H2835-96-24	96	8.0[314.96]	83.3[3.28]	
VF2-T-H2835-128-12	128	3.5[137.79]	31.3[1.23]	
VF2-T-H2835-128-24	128	6.5[255.90]	62.5[2.46]	

Profile Drawings


Length Unit : mm/inch

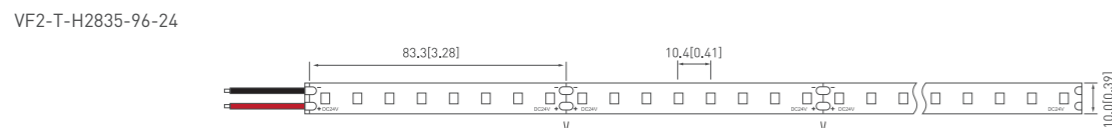

VF2-T-H2835-128-12



VF2-T-H2835-128-24



Quick Connector



VFN-W10FF2 VFN-W10CF2



VFN-W10FF2G VFN-W10CF2G



S10W0 S10W1 S10W2

Suitable for 10mm width product with LED density less than 120LEDs/m.

Suitable for 10mm width product with LED density above 120LEDs/m.

Suitable for 10mm width product.


Note: IP22 Non-waterproof accessories listed above, please check accessory page for waterproof accessories.

Wire




20awg UL2464 jacket wire 20awg UL2468 wire

Aluminum Profile




SL250712-A



SL170712-A



SL171512-A



SL251512-A



SL161610-A



SL161610-B

Note: Only limited profile models illustrated, please check our profile catalog for more information.